


带通滤波器

BP-06	01
BP-14F	01
BP-65	02

带通滤波器



型 号(Model): BP-06

插入损耗(Insertion Loss): $50-85\text{MHz} \leq 2.0\text{dB}$

反射损耗(Return Loss): $50-85\text{MHz} \geq 14\text{dB}$

带外抑制 (Out-band Rejection): $5-41\text{MHz} \geq 40\text{dB}$ $99-860\text{MHz} \geq 40\text{dB}$

阻抗 (Impeance): 75Ω

型 号(Model): BP-06


插入损耗(Insertion Loss): $510-590\text{MHz} \leq 3.0\text{dB}$

反射损耗(Return Loss): $510-590\text{MHz} \geq 14\text{dB}$



带外抑制 (Out-band Rejection): $5-450\text{MHz} \geq 30\text{dB}$ $650-860\text{MHz} \geq 30\text{dB}$

阻抗 (Impeance): 75Ω

外形尺寸
Dimensions



单位:mm
Unit:mm



型 号(Model): BP-14F

插入损耗(Insertion Loss): $47-300\text{MHz} \leq 3.0\text{dB}$

反射损耗(Return Loss): $47-300\text{MHz} \geq 14\text{dB}$

带外抑制 (Out-band Rejection): $5-40\text{MHz} \geq 50\text{dB}$ $328-860\text{MHz} \geq 50\text{dB}$

阻抗 (Impeance): 75Ω

型 号(Model): BP-14F


插入损耗(Insertion Loss): $480-600\text{MHz} \leq 3.0\text{dB}$

反射损耗(Return Loss): $480-600\text{MHz} \geq 14\text{dB}$

带外抑制 (Out-band Rejection): $5-238\text{MHz} \geq 50\text{dB}$ $511-860\text{MHz} \geq 50\text{dB}$

阻抗 (Impeance): 75Ω

外形尺寸
Dimensions

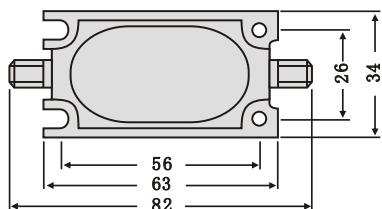


F座公制 (英制)
F Connector Metric (Inch)

单位:mm
Unit:mm





带通滤波器



型 号(Model):BP-65

插入损耗(Insertion Loss):84-92MHz $\leq$ 2.5dB

反射损耗(Return Loss):84-92MHz $\geq$ 12dB

带外抑制 (Out-band Rejection): 5-42MHz $\geq$ 30dB 68-860MHz $\geq$ 30dB

阻抗 (Impeance): 75 Ω

型 号(Model):BP-65


插入损耗(Insertion Loss):215-223MHz $\leq$ 3.0dB

反射损耗(Return Loss):215-223MHz $\geq$ 12dB

带外抑制 (Out-band Rejection): 5-197MHz $\geq$ 30dB 236-860MHz $\geq$ 30dB

阻抗 (Impeance): 75 Ω

外形尺寸
Dimensions



单位:mm
Unit:mm

