


带阻滤波器

BR-14F	01
BRR-14F	01
BR-105F	02
BRR-105F	02

带阻滤波器



型号(Model): BR-14F

插入损耗(Insertion Loss): 5-408MHz ≤ 3.0 dB 446-860MHz ≤ 3.0 dB

反射损耗(Return Loss): 5-408MHz ≥ 12 dB 446-860MHz ≥ 12 dB

阻带抑制 (Stopband rejection): 431MHz ≥ 50 dB

阻抗 (Impeance): 75 Ω

型号(Model): BR-14F


插入损耗(Insertion Loss): 5-432MHz ≤ 3.0 dB 611-860MHz ≤ 3.0 dB

反射损耗(Return Loss): 5-432MHz ≥ 12 dB 611-860MHz ≥ 12 dB

阻带抑制 (Stopband rejection): 470-566MHz ≥ 50 dB


阻抗 (Impeance): 75 Ω

外形尺寸
Dimensions

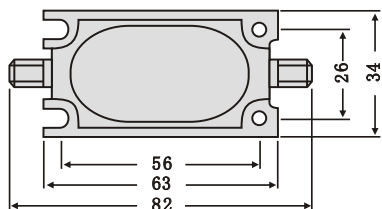

F座公制 (英制)
F Connector Metric (Inch)

单位:mm
Unit:mm



型号(Model): BRR-14F

插入损耗(Insertion Loss): 5-151MHz ≤ 3.0 dB 191-215MHz ≤ 3.0 dB 255-860MHz ≤ 3.0 dB

反射损耗(Return Loss): 5-151MHz ≥ 12 dB 191-215MHz ≥ 12 dB 255-860MHz ≥ 12 dB

阻带抑制 (Stopband rejection): 166.75-176.25MHz ≥ 40 dB 232.25-238.75MHz ≥ 40 dB

阻抗 (Impeance): 75 Ω

型号(Model): BRR-14F


插入损耗(Insertion Loss): 5-275MHz ≤ 4.0 dB 345-578MHz ≤ 4.0 dB 738-1000MHz ≤ 4.0 dB

反射损耗(Return Loss): 5-275MHz ≥ 12 dB 345-578MHz ≥ 12 dB 738-1000MHz ≥ 12 dB

阻带抑制 (Stopband rejection): 295-315MHz ≥ 40 dB 628-666MHz ≥ 40 dB


阻抗 (Impeance): 75 Ω

外形尺寸
Dimensions

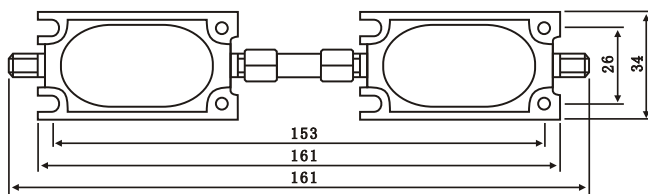


F座公制
F Connector Metric

单位:mm
Unit:mm

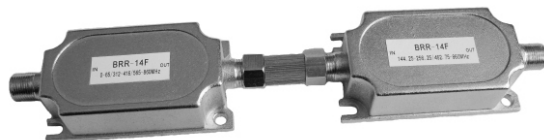

带阻滤波器



型 号(Model):BR-105F

插入损耗(Insertion Loss):5-106MHz≤3.0dB 115-860MHz≤3.0dB

反射损耗(Return Loss):5-106MHz≥16dB 115-860MHz≥16dB

阻带抑制 (Stopband rejection): 110MHz≥50dB

阻抗 (Impeance): 75Ω

型 号(Model):BR-105F




插入损耗(Insertion Loss):5-200.25MHz≤5.0dB 392.25-860MHz≤5.0dB

反射损耗(Return Loss):5-200.25MHz≥14dB 392.25-860MHz≥14dB

阻带抑制 (Stopband rejection): 219-371MHz≥50dB


阻抗 (Impeance): 75Ω

外形尺寸
Dimensions

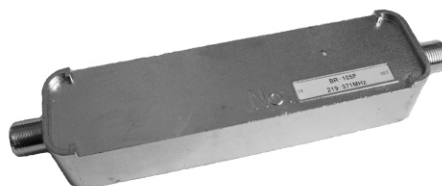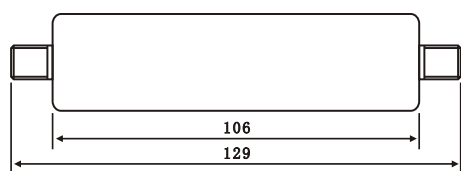

F座英制
F Connector Inch

单位:mm
Unit:mm



型 号(Model):BRR-105F

插入损耗(Insertion Loss):5-92MHz≤3.0dB 239-700MHz≤5.0dB

反射损耗(Return Loss):5-92MHz≥15dB 239-700MHz≥15dB

阻带抑制 (Stopband rejection): 111-223MHz≥45dB 730-1000MHz≥45dB

阻抗 (Impeance): 75Ω

型 号(Model):BRR-105F




插入损耗(Insertion Loss):111-159MHz≤5.0dB 239-534MHz≤3.0dB

反射损耗(Return Loss):111-159MHz≥14dB 239-534MHz≥12dB

阻带抑制 (Stopband rejection): 5-98MHz≥40dB 175-215MHz≥40dB 575-1000MHz≥40dB

阻抗 (Impeance): 75Ω

外形尺寸
Dimensions

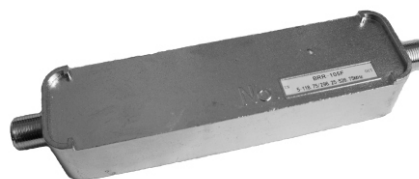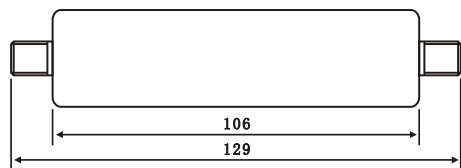

F座英制
F Connector Inch

单位:mm
Unit:mm

我们愿与您风雨同舟