



螺旋腔体滤波器

LBP-C Z15-Z43	01
LBP-C DS13-DS56	01
LBP-D Z11-Z43	01
LBP-D DS13-DS56	01
LBP-DF/DS Z11-Z43	01
LBP-DF/DS DS13-DS56	01
LBP-D3 1220MHz	02
LBP-D4 1000MHz	02
HBP-DN/DS 355.25MHz	02
HBP-DN/DS 535.25MHz	02
HBP-DN/DS 577.25MHz	02
LBP-D 420MHz	03
LBP-D 1220MHz	03
LBP-DF/DS 379MHz	03
LBP-DF/DS 580MHz	03
LBP-E Z15-Z43	03
LBP-E DS13-DS56	03

螺旋腔体滤波器

型号 (Model)	频道 (Channel) MHz	插入损耗 (Insertion Loss) MHz	dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz	dB	阻抗 (Impedance) Ω
LBP-C	Z15-Z43	$f_0 \pm 4$	≤ 3.0	≥ 10	$f_0 \pm 15$	≥ 20	75
LBP-C	DS13-DS43	$f_0 \pm 4$	≤ 3.0	≥ 10	$f_0 \pm 15$	≥ 20	75
LBP-C	DS44-DS56	$f_0 \pm 4$	≤ 3.5	≥ 10	$f_0 \pm 15$	≥ 20	75

外形尺寸
Dimensions





单位:mm
Unit:mm




型号 (Model)	频道 (Channel) MHz	插入损耗 (Insertion Loss) MHz	dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz	dB	阻抗 (Impedance) Ω
LBP-D	Z11-Z43	$f_0 \pm 4$	≤ 3.0	≥ 12	$f_0 \pm 15$	≥ 30	75
LBP-D	DS13-DS43	$f_0 \pm 4$	≤ 3.0	≥ 12	$f_0 \pm 15$	≥ 30	75
LBP-D	DS44-DS56	$f_0 \pm 4$	≤ 3.5	≥ 12	$f_0 \pm 15$	≥ 30	75

外形尺寸
Dimensions


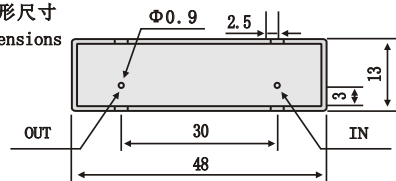


单位:mm
Unit:mm



型号 (Model)	频道 (Channel) MHz	插入损耗 (Insertion Loss) MHz	dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz	dB	阻抗 (Impedance) Ω
LBP-DF/DS	Z11-Z43	$f_0 \pm 4$	≤ 3.0	≥ 12	$f_0 \pm 15$	≥ 30	75/50
LBP-DF/DS	DS13-DS43	$f_0 \pm 4$	≤ 3.0	≥ 12	$f_0 \pm 15$	≥ 30	75/50
LBP-DF/DS	DS44-DS56	$f_0 \pm 4$	≤ 4.0	≥ 12	$f_0 \pm 15$	≥ 30	75/50

外形尺寸
Dimensions





单位:mm
Unit:mm




螺旋腔体滤波器

型号 (Model)	中心频率 (Center frequency) MHz	插入损耗 (Insertion Loss) MHz dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz dB	阻抗 (Impedance) Ω
LBP-D3	1220	$f_0 \pm 16$ ≤ 2.5	≥ 15	$f_0 \pm 44$ ≥ 30	75

外形尺寸
Dimensions


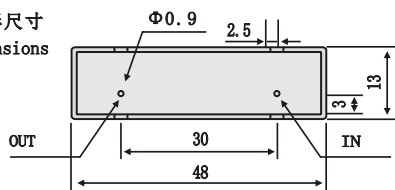


单位:mm
Unit:mm




型号 (Model)	中心频率 (Center frequency) MHz	插入损耗 (Insertion Loss) MHz dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz dB	阻抗 (Impedance) Ω
LBP-D4	1000	$f_0 \pm 10$ ≤ 3.5	≥ 15	$f_0 \pm 50$ ≥ 45	75

外形尺寸
Dimensions


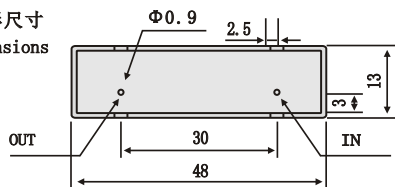


单位:mm
Unit:mm




型号 (Model)	频道 (Channel) MHz	插入损耗 (Insertion Loss) MHz dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz dB	阻抗 (Impedance) Ω
HBP-DN/DS	355.25	355.25 ≤ 2.6	≥ 15	≤ 346 ≥ 40	50
		$f_0 \pm 3$ ≤ 5.6		≥ 364 ≥ 40	
HBP-DN/DS	535.25	535.25 ≤ 3.0	≥ 15	≤ 525 ≥ 40	50
		$f_0 \pm 4$ ≤ 6.0		≥ 546 ≥ 40	
HBP-DN/DS	577.25	577.25 ≤ 3.0	≥ 15	≤ 564 ≥ 40	50
		$f_0 \pm 4$ ≤ 6.0		≥ 588 ≥ 40	

外形尺寸
Dimensions

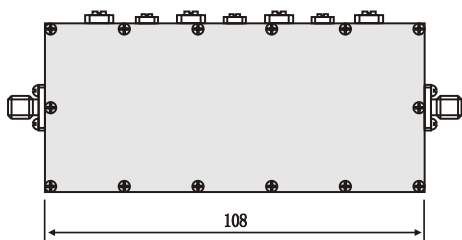


单位:mm
Unit:mm


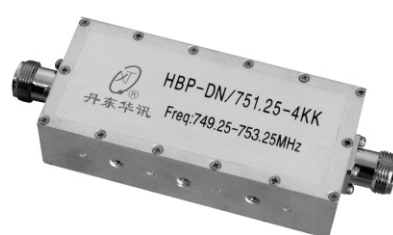


螺旋腔体滤波器

型 号 (Model)	中心频率 (Center frequency) MHz	插入损耗 (Insertion Loss) MHz dB		反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz dB		阻 抗 (Impedance) Ω
LBP-D	420	$f_0 \pm 2$	≤ 4.8	≥ 15	$f_0 \pm 15$	≥ 50	75
LBP-D	1220	$f_0 \pm 16$	≤ 2.5	≥ 15	$f_0 \pm 40$	≥ 30	75

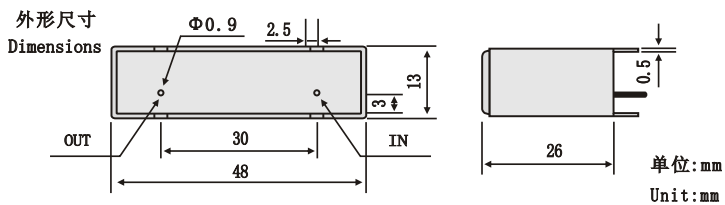



型 号 (Model)	频道 (Channel) MHz	插入损耗 (Insertion Loss) MHz dB		反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz dB		阻 抗 (Impeance) Ω
HBP-DF/DS	379	$f_0 \pm 12$	≤ 3.0	≥ 12	≤ 330	≥ 60	75/50
					≥ 430	≥ 40	
HBP-DF/DS	580	$f_0 \pm 5$	≤ 3.0	≥ 15	≤ 564	≥ 30	75/50
					≥ 597	≥ 30	

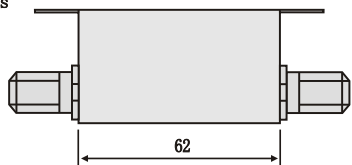

单位:mm
Unit:mm



型 号 (Model)	频道 (Channel) MHz	插入损耗 (Insertion Loss) MHz dB		反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz dB		阻 抗 (Impeance) Ω
LBP-E	Z15-Z43	$f_0 \pm 4$	≤ 4.0	≥ 12	$f_0 \pm 15$	≥ 35	75
LBP-E	DS13-DS43	$f_0 \pm 4$	≤ 4.0	≥ 12	$f_0 \pm 15$	≥ 35	75
LBP-E	DS44-DS56	$f_0 \pm 4$	≤ 4.5	≥ 12	$f_0 \pm 15$	≥ 35	75

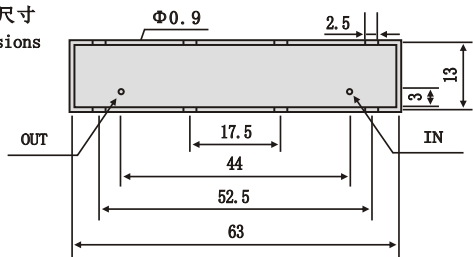

單位:mm
Unit:mm

