


目录


DMX-103、DMX-203	01
DMX-204、DMX-604	02
DDMX-204、DDMX-604	03
DDMX-604、DDMX-404	04
DDMX-606	05
DDMX-506	06
DDMX-309、DDMX-810	07
DDMX-810、DDMX-906	08
DDMX-105	09
DDMX-505	10
DDMX-505、DDMX-605	11
DDMX-605、DDMX-709	12
DDMX-709、DDMX-909	13

EOC耦合器/混合器/分离器

型 号 Model	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation(LP-HP)		过电 Power Pass	阻 抗 Impedance Ω
		MHz	dB		MHz	dB	MHz	dB		
DMX-103P-30/47-3A	B-A	5-30	≤1.0	≥16 (8-30MHz)	47-860	≥40	5-30	≥45		75
	B-C	47-500	≤1.0	≥16	5-30	≥45	47-860	≥40	63VAC 3A	75
		500-750	≤1.5							
		750-860	≤1.0							
DMX-103P-65/87-3A	B-A	5-65	≤1.0	≥16 (8-65MHz)	87-860	≥40	5-65	≥45		75
	B-C	87-500	≤1.0	≥16	5-65	≥45	87-860	≥40	63VAC 3A	75
		500-600	≤1.5							
		600-860	≤1.0							

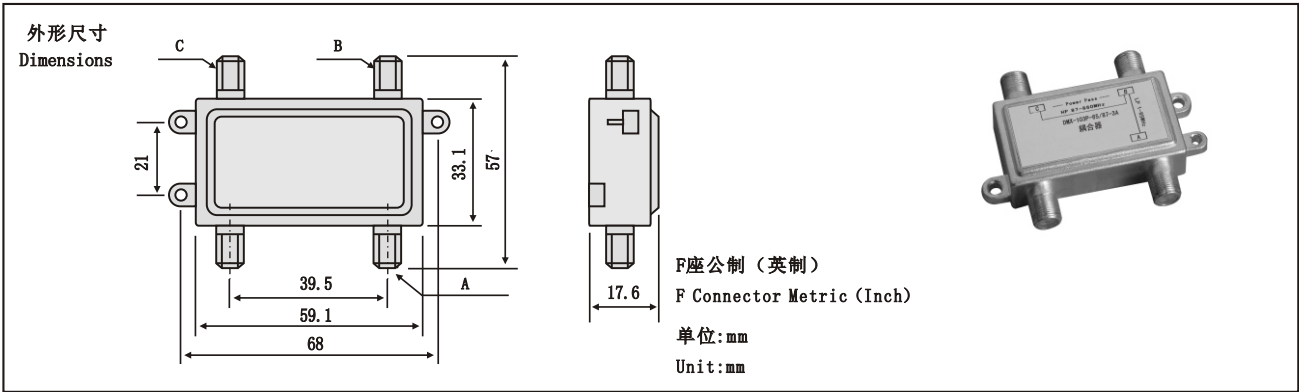

型 号 Mondel	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		过电 Power Pass	阻 抗 Impedance Ω
		MHz	dB		MHz	dB		
DMX-203-47/62	A-B	5-47	≤1.0	≥16	62-700	≥50		75
			700-860	≥40				
	C-B	62-860	≤1.0	≥16	5-47	≥50		
DMX-203PA-47/62	A-B	5-10	≤1.0	≥10	62-700	≥50	63VAC 3A	75
		10-47	≤1.0	≥16	700-860	≥40		
	C-B	62-750	≤1.0	≥16	5-47	≥50	63VAC 10A	
		750-860	≤1.4					

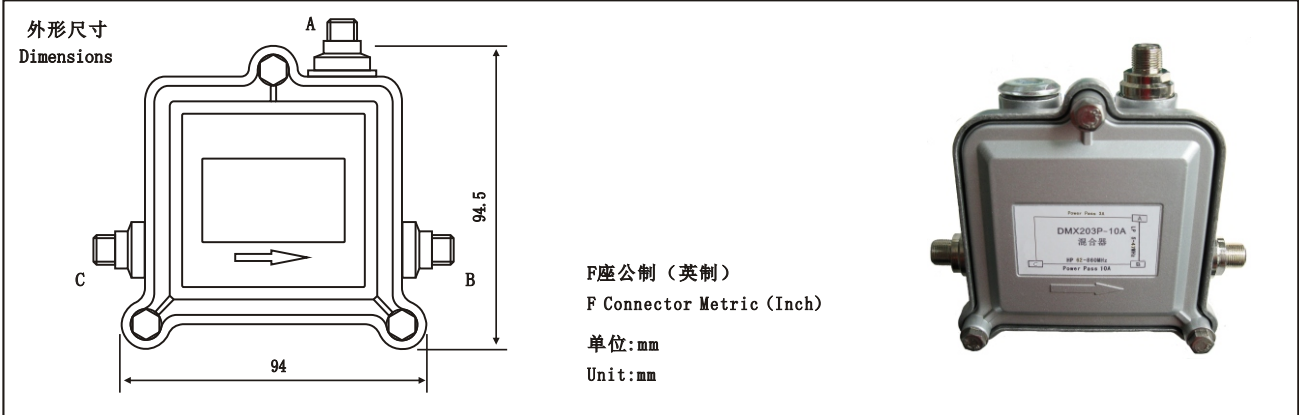


我们愿与您风雨同舟




EOC耦合器/混合器/分离器

型 号 Mondel	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		过电 Power Pass	取电 Power Over	阻 抗 Impedance Ω
		MHz	dB		MHz	dB			
DMX-204PB-47/62	A-B	5-10	≤1.0	≥10	62-700	≥50	63VAC 3A	D端口 D Port	75
		10-47	≤1.0	≥16	700-860	≥40			
	C-B	62-750	≤1.0	≥16	5-47	≥50	63VAC 10A	63VAC 3A	
		750-860	≤1.4						

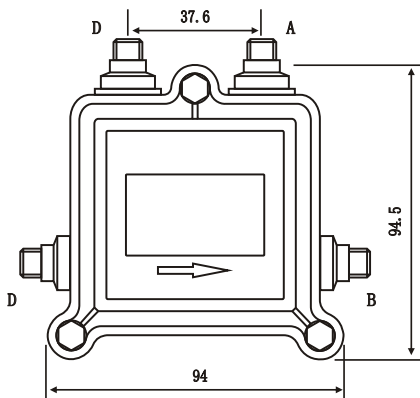
外形尺寸
DimensionsF座公制 (英制)
F Connector Metric (Inch)单位:mm
Unit:mm

型 号 Mondel	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss	带外抑制 Out-band Rejection		相互隔离 Isolation(LP-HP)		过电 Power Pass	取电 Power Over	阻 抗 Impedance
		MHz	dB	dB	MHz	dB	MHz	DB			Ω
DMX-604P-800/910-10A	A-D	5-20	≤1.5	≥7	900-915	≥50	3-800	≥45	63VAC 10A (A-D)	B端口 B Port 63VAC 3A	75
		20-700	≤1.0	≥14	915-1100	≥45	800-910	≥35			
		700-800	≤2.5								
	A-C	910-1100	≤1.4	≥12	3-750	≥50	910-1100	≥45			
					750-800	≥45					

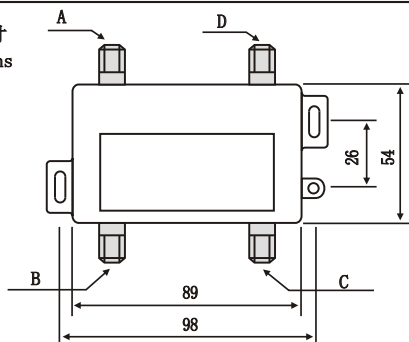
外形尺寸
DimensionsF座公制 (英制)
F Connector Metric (Inch)单位:mm
Unit:mm

EOC耦合器/混合器/分离器

型 号 Model	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss	带外抑制 Out-band Rejection		相互隔离 Isolation(LP-HP)		过电 Power Pass	阻 抗 Impedance
		MHz	dB	dB	MHz	dB	MHz	dB		Ω
DDMX-104P-65/87-3A	B-C (C-B)	5-8	≤3.0	≥16 (12-65MHz)	87-860	≥40	5-65	≥45		75
		8-60	≤1.0							
		60-65	≤1.5							
	B-A C-D	87-350	≤1.0	≥16	5-65	≥45	87-860	≥40	63VAC 3A	
		350-650	≤1.5							
		650-860	≤1.0							
DDMX-104-65/87	B-C (C-B)	5-64	≤1.0	≥18	87-860	≥50	5-65	≥50	75	
		64-65	≤1.1							
	B-A C-D	87-860	≤1.0	≥18	5-65	≥50	87-860	≥50		

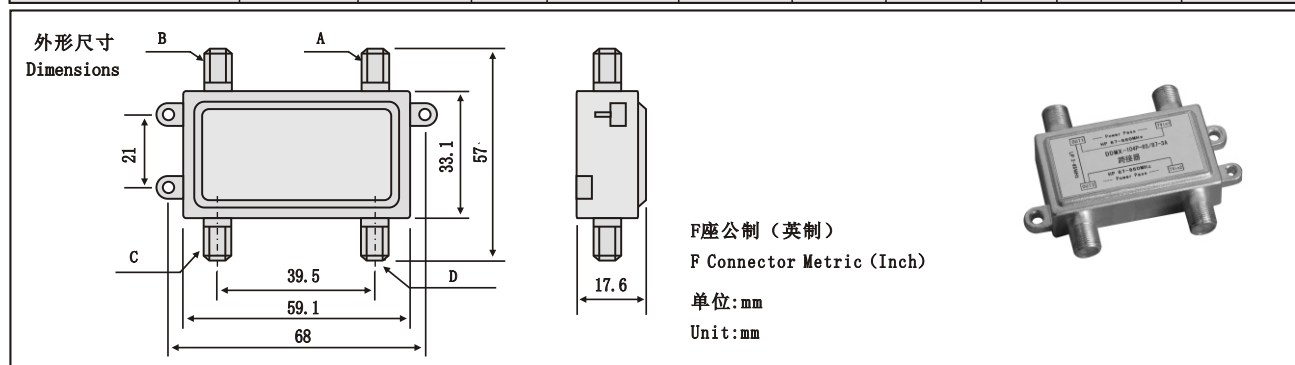


型 号 Model	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation(LP-HP)		过电 Power Pass	阻 抗 Impedance Ω
		MHz	dB		MHz	dB	MHz	dB		
DDMX-604P-30/47-6A	B-C (C-B)	5-7.5	≤3.0	≥10	47-860	≥60	5-30	≥50		75
		7.5-30	≤1.0	≥16						
	B-A D-C	47-860	≤1.0	≥16	5-30	≥50	47-860	≥60	63VAC 6A	75

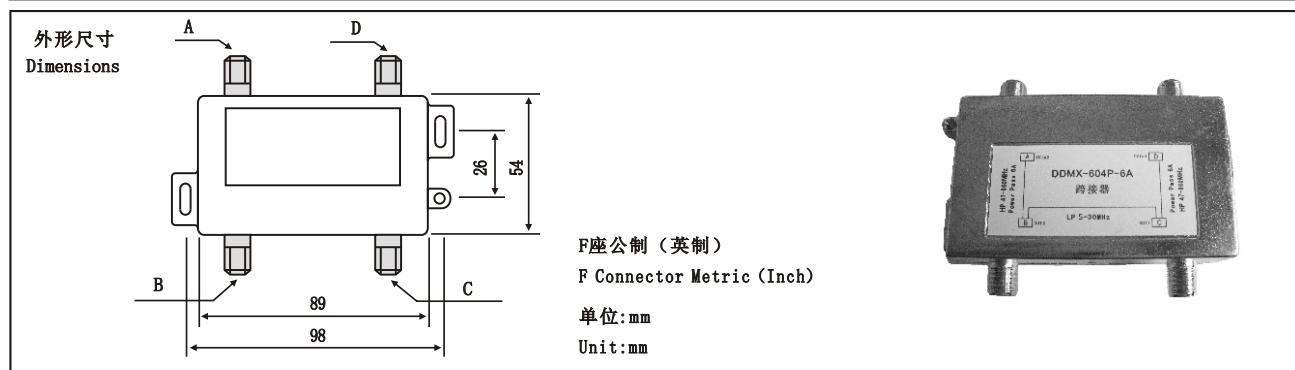


EOC跨接器/旁路器/桥接器

型 号 Model	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation (LP-HP)		过电 Power Pass	阻 抗 Impedance Ω
		MHz	dB		MHz	dB	MHz	dB		
DDMX-604P-65/87-6A	B-C (C-B)	5-7.5	≤3.0	≥10	87-860	≥60	5-65	≥50		75
		7.5-65	≤1.0	≥16						
	B-A D-C	87-860	≤1.0	≥16	5-65	≥50	87-860	≥60	63VAC 6A	75

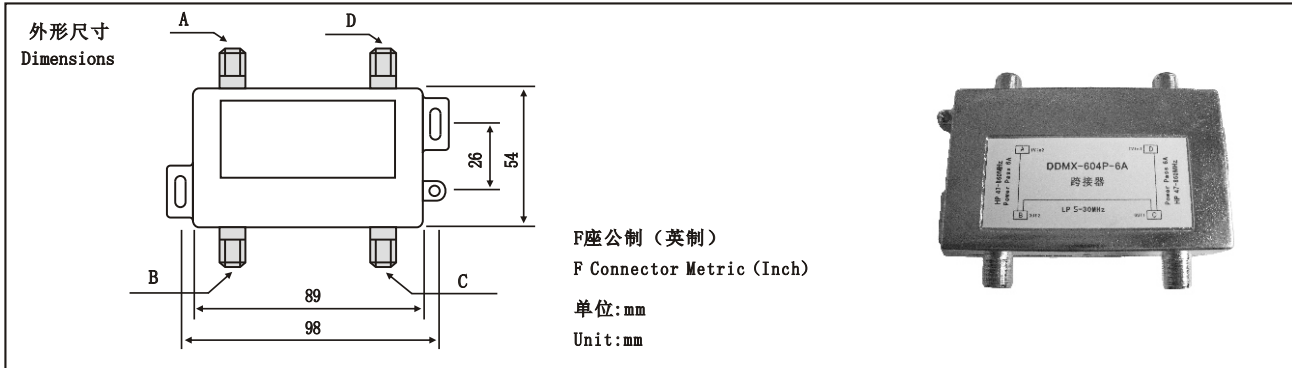


型 号 Model	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation (LP-HP)		过电 Power Pass	阻 抗 Impedance Ω
		MHz	dB		MHz	dB	MHz	dB		
DDMX-404P-30/47-10A	B-C (C-B)	2-3.5	≤3.0	≥16 (6-30MHz)	47-650	≥50	2-4	≥30		75
		3.5-30	≤1.0		650-860	≥40				
	B-A C-D	47-750	≤1.0	≥16	2-4	≥30	4-650	≥50	63VAC 10A	75
		750-860	≤1.5		4-30	≥50	650-860	≥50		

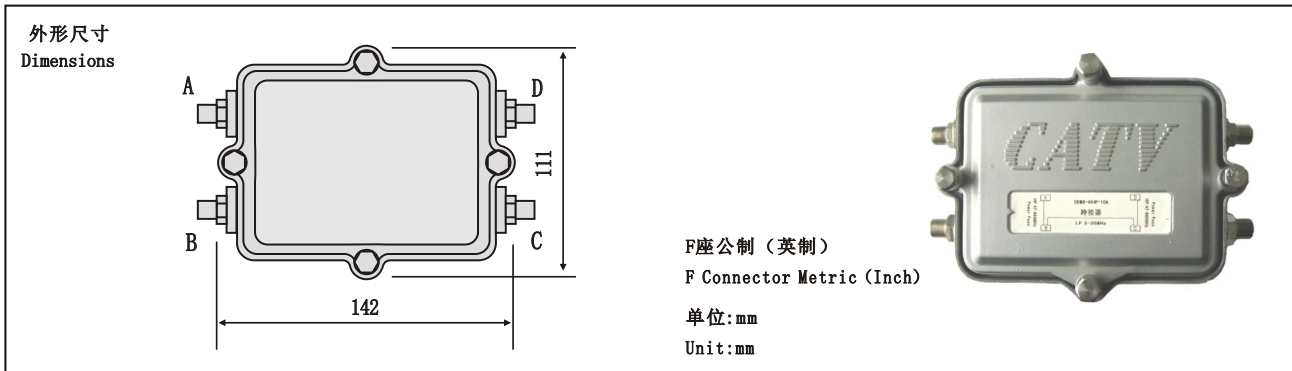


EOC跨接器/旁路器/桥接器

型 号 Mondel	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation(LP-HP)			过电 Power Pass	阻 抗 Impedance Ω
		MHz	dB		MHz	dB		MHz	dB		
DDMX-606 -65/87	B-A B-C			≥16 (2-65MHz)	87-500	≥50	A-C端口	1-2.5	≥12		75
		1-58	≤4.0		500-860	≥40		2.5-75	≥20		
		58-65	≤5.0					75-860	≥50		
	A-D	87-860	≤1.0	≥16	1-65	≥50	A-E端口	1-860	≥40		75
	B-E	87-550	≤1.0				C-E端口	1-860	≥40		
		550-860	≤1.5				B-D端口	1-860	≥40		
	C-F	87-860	≤1.0				B-F端口	1-860	≥40		

外形尺寸
Dimensions

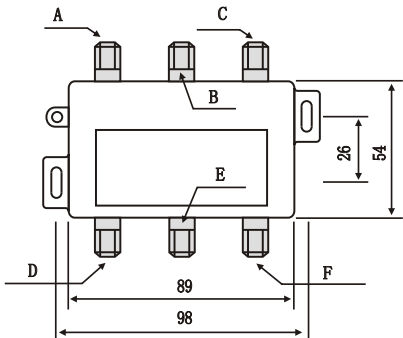


F座公制 (英制)
F Connector Metric (Inch)
单位:mm
Unit:mm



型 号 Mondel	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation(LP-HP)			过电 Power Pass	阻 抗 Impedance Ω
		MHz	dB		MHz	dB		MHz	dB		
DDMX-606P -65/87-3A	B-A B-C	1-2	≤12	≥16 (12-65MHz)	87-500	≥50	A-C端口	1-3	≥10		75
		2-58	≤4.5		500-860	≥40		3-75	≥20		
		58-65	≤5.0					75-860	≥50		
	A-D	87-860	≤1.0	≥16	1-4	≥15	A-E端口	1-4	≥20	63VAC 3A	75
		4-860	≥40					4-860	≥40		
	B-E	87-550	≤1.0		C-E端口	1-4	≥20	4-860	≥40		
		550-860	≤1.5			4-860	≥40	4-860	≥40		
	C-F	87-860	≤1.0			4-65	≥40	B-D端口	1-4		
									B-F端口	1-4	≥20

外形尺寸
Dimensions

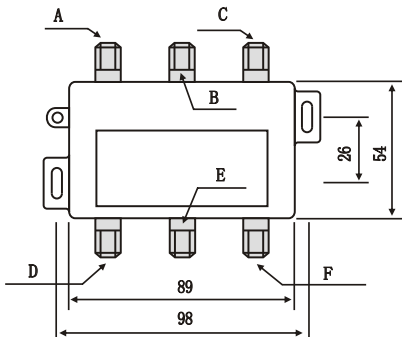


F座公制 (英制)
F Connector Metric (Inch)
单位:mm
Unit:mm





EOC跨接器/旁路器/桥接器


型 号 Mondel	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss	带外抑制 Out-band Rejection		相互隔离 Isolation (LP-HP)		过电 Power Pass	阻 抗 Impedance Ω
		MHz	dB		MHz	dB	MHz	dB		
DDMX-506P -30/47-10A	F-E F-B	7.5-30	≤ 5.0	≥ 16	47-450	≥ 50	7.5-30	≥ 40	63VAC 10A	75
					450-860	≥ 40				
	F-C A-B	47-750	≤ 1.5	≥ 16	7.5-30	≥ 40	47-450	≥ 50		75
	D-E	750-860	≤ 1.5				450-860	≥ 40		

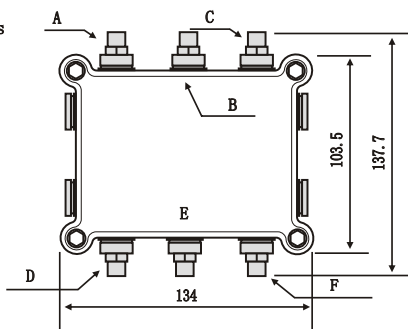外形尺寸
Dimensions

F座公制
F Connector Metric
单位:mm
Unit:mm



型 号 Mondel	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss	带外抑制 Out-band Rejection		相互隔离 Isolation (LP-HP)		过电 Power Pass	阻 抗 Impedance Ω
		MHz	dB		MHz	dB	MHz	dB		
DDMX-506P -65/87-10A	F-E F-B	5-65	≤ 5.0	≥ 16 (7.5-65MHz)	87-450	≥ 50	5-7.5	≥ 30	63VAC 10A	75
					450-860	≥ 40	7.5-65	≥ 40		
	F-C A-B	87-860	≤ 1.0	≥ 16	5-7.5	≥ 30	87-450	≥ 50		75
	D-E	860-1000	≤ 2.0		7.5-65	≥ 40	450-860	≥ 40		
							860-1000	≥ 35		

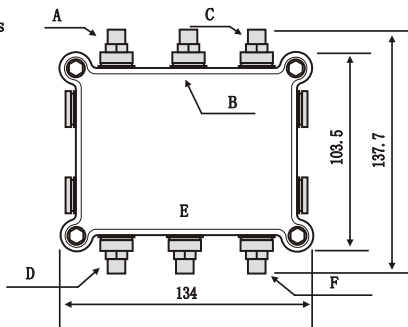
外形尺寸
Dimensions

F座公制
F Connector Metric
单位:mm
Unit:mm




EOC跨接器/旁路器/桥接器

型 号 Model	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation (LP-HP)		过电 Power Pass	阻 抗 Impedance Ω
		MHz	dB		MHz	dB	MHz	dB		
DDMX-309		5-65	≤ 8.5	≥ 16	87-300	≥ 50	5-65	≥ 50		75
					300-860	≥ 40				
		87-860	≤ 1.0	≥ 16	5-65	≥ 50	87-300	≥ 50		75
							300-860	≥ 40		

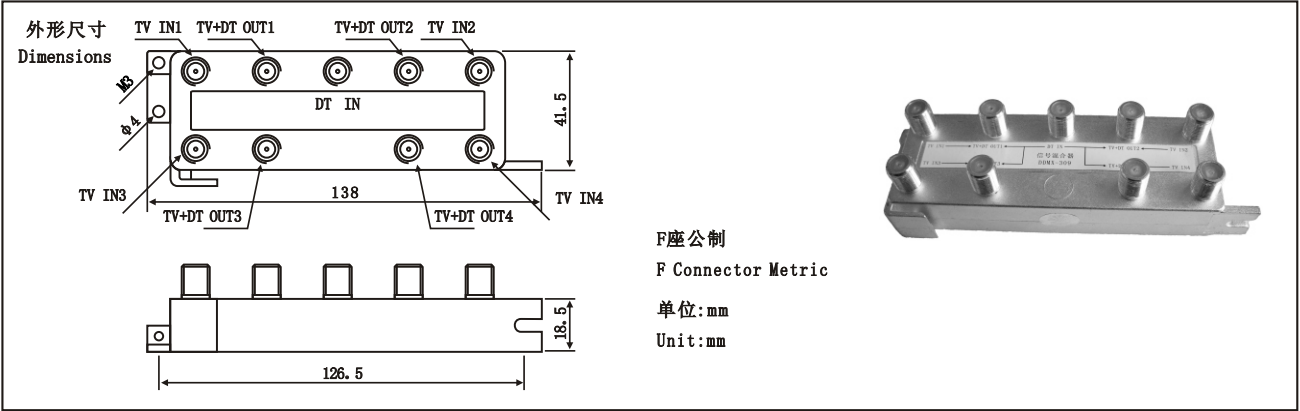

型 号 Model	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation (LP-HP)		过电 Power Pass	阻 抗 Impedance Ω
	MHz	dB		MHz	dB	MHz	dB		
DDMX-810P-30/47-6A	7.5-12	≤ 9.0	≥ 10	47-150	≥ 40	7.5-30	≥ 40		75
	12-30	≤ 9.0	≥ 15	150-860	≥ 35				
	47-860	≤ 2.0	≥ 15	7.5-30	≥ 40	47-150	≥ 40	63VAC 6A	75
						450-860	≥ 35		


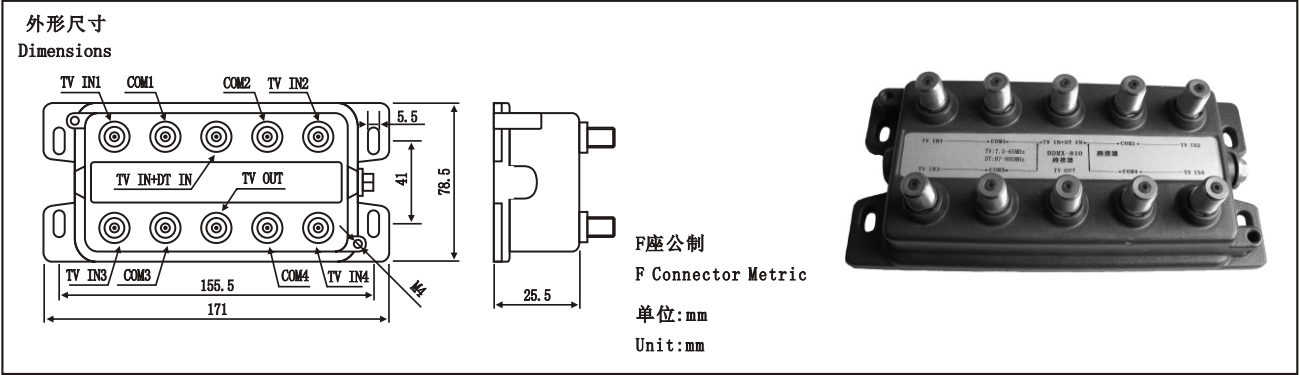


EOC跨接器/旁路器/桥接器

型 号 Model	插入损耗 Insertion Loss		反射损耗 Return Loss	带外抑制 Out-band Rejection		相互隔离 Isolation(LP-HP)		过电 Power Pass	阻 抗 Impedance Ω
	MHz	dB		MHz	dB	MHz	dB		
DDMX-810P-65/87-6A	7.5-12	≤9.0	≥10	87-150	≥40	7.5-65	≥40	63VAC 6A	75
	12-65	≤9.0	≥15	150-860	≥35				
	87-860	≤2.0	≥15	7.5-65	≥40	87-150	≥40		75
						450-860	≥35		

外形尺寸

Dimensions

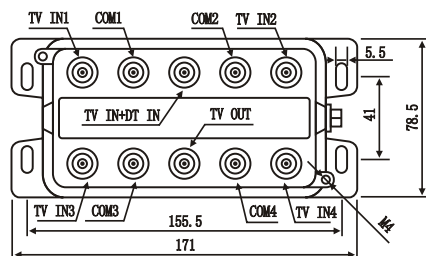

F座公制

F Connector Metric

单位:mm


Unit:mm



型 号 Model	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss	带外抑制 Out-band Rejection		相互隔离 Isolation(LP-HP)		过电 Power Pass	阻 抗 Impedance Ω
		MHz	dB		MHz	dB	MHz	dB		
DDMX-906P-860/975-10A	F-E F-B	7.5-860	≤2.0	≥16	975-1100	≥40	7.5-860	≥40	63VAC 6A	75
	F-C A-B D-E	975-1100	≤9.0	≥16	7.5-860	≥40	975-1100	≥40		

外形尺寸

Dimensions

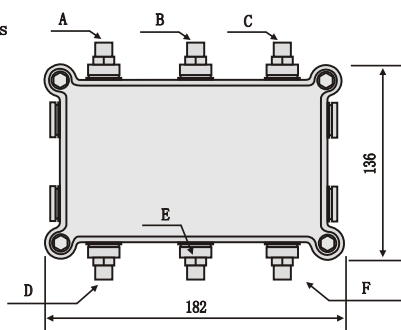

F座公制

F Connector Metric

单位:mm


Unit:mm



E0C信号混合器

型 号 Mondel	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation(LP-HP)		过电 Power Pass	阻 抗 Impedance Ω
		MHz	dB		MHz	dB	MHz	dB		
DDMX-105 5-65/87-860	E-D E-C	5-65	≤4.5	≥16	87-600	≥50	5-65	≥50		75
					600-860	≥45				
	A-D B-C	87-860	≤1.0	≥16	5-65	≥50	87-600	≥50		75
							600-860	≥45		


外形尺寸
Dimensions

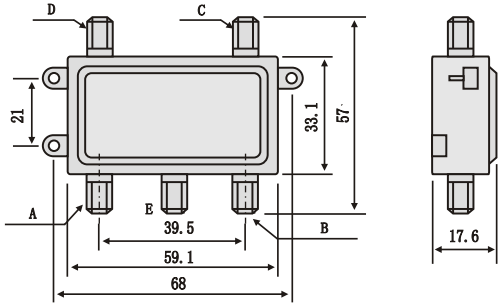

F座公制 (英制)
F Connector Metric (Inch)
单位:mm
Unit:mm

型 号 Mondel	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation(LP-HP)		过电 Power Pass	阻 抗 Impedance Ω
		MHz	dB		MHz	dB	MHz	dB		
DDMX-105 5-860/975-1100	A-D B-C	5-750	≤1.0	≥16	975-1100	≥45	5-860	≥45		75
		750-860	≤1.5							
	E-D E-C	975-1100	≤8.0	≥14	5-860	≥45	975-1100	≥45		75


外形尺寸
Dimensions

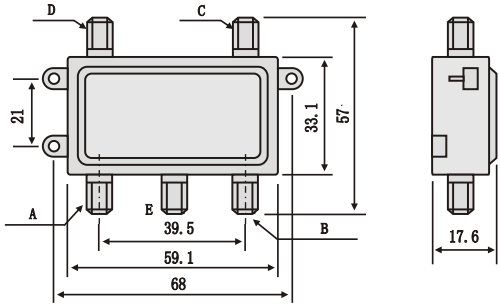


F座公制 (英制)
F Connector Metric (Inch)
单位:mm
Unit:mm

EOC信号混合器

型号 Model	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation(LP-HP)		过电 Power Pass	阻抗 Impedance Ω
		MHz	dB		MHz	dB	MHz	dB		
DDMX-505P -30/47-10A	C-E	5-10	≤ 4.5	≥ 10	47-450	≥ 40	5-30	≥ 50	63VAC 10A	75
	C-D	10-30	≤ 4.5	≥ 16	450-860	≥ 30				
	A-E	47-600	≤ 1.0	≥ 16	5-30	≥ 50	47-450	≥ 40		75
	B-D	600-860	≤ 2.5				450-860	≥ 30		

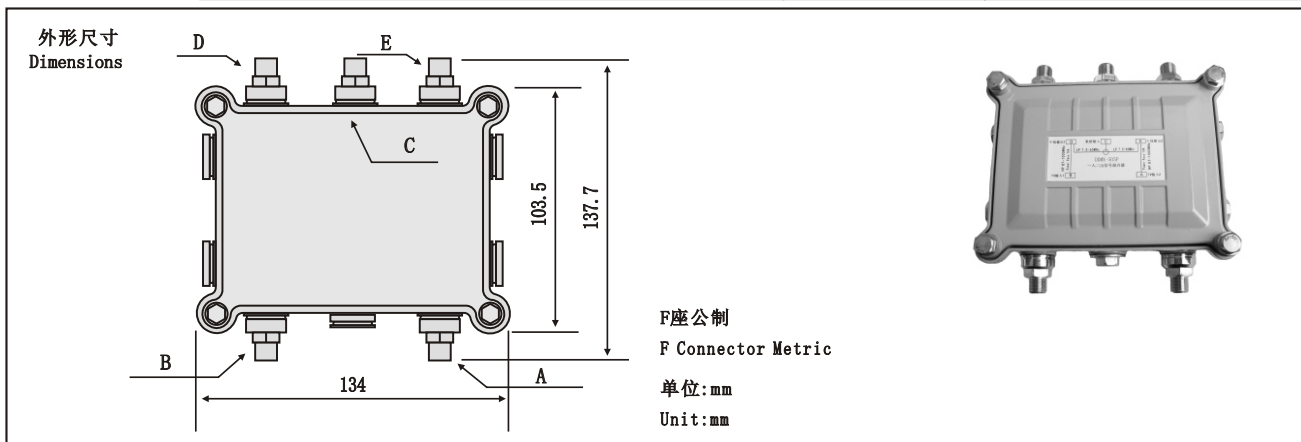

型号 Model	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation(LP-HP)		过电 Power Pass	阻抗 Impedance Ω
		MHz	dB		MHz	dB	MHz	dB		
DDMX-505P -65/87-10A	C-E	7.5-65	≤ 5.0	≥ 16	87-550	≥ 50	7.5-65	≥ 50	63VAC 10A	75
	C-D				550-860	≥ 40				
	A-E	87-860	≤ 1.5	≥ 16	7.5-65	≥ 50	87-550	≥ 50		75
	B-D						550-860	≥ 40		

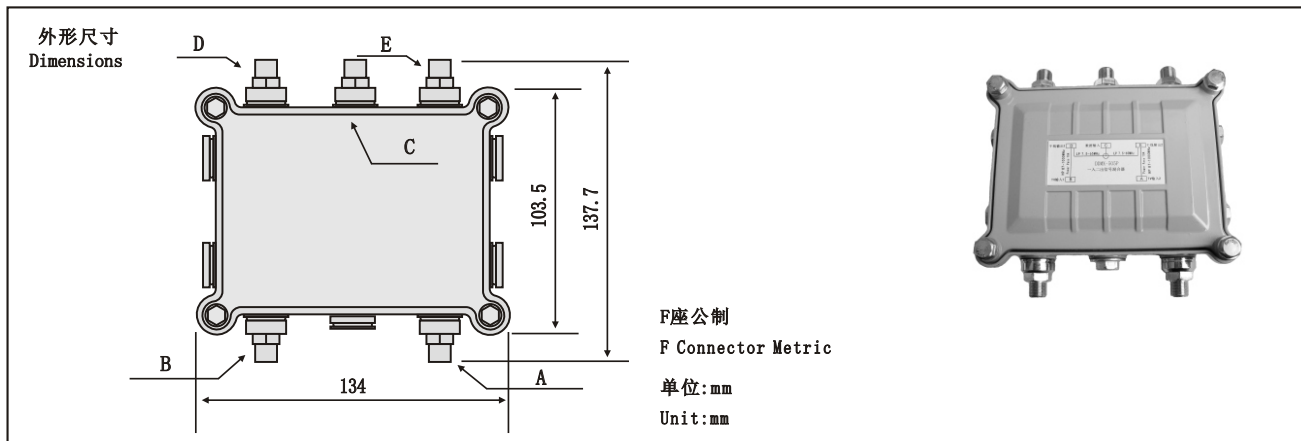



EOC信号混合器

型 号 Mondel	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation(LP-HP)		过电 Power Pass	阻 抗 Impedance Ω
		MHz	dB		MHz	dB	MHz	dB		
DDMX-505P -860/975-10A	A-E B-D	7.5-20	≤2.5	≥10	975-1100	≥35	7.5-860	≥40	63VAC 10A	75
		20-860	≤2.5	≥15						
	C-E C-D	975-1100	≤8.0	≥14	7.5-860	≥40	975-1100	≥35		75

外形尺寸
Dimensions

F座公制 (英制)
F Connector Metric (Inch)

单位:mm
Unit:mm

型 号 Mondel	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation(LP-HP)		过电 Power Pass	阻 抗 Impedance Ω
		MHz	dB		MHz	dB	MHz	dB		
DDMX-605P -65/87-3A	C-E C-D	1-2	≤6.5	≥16 (9-65MHz)	87-500	≥50	1-4	≥16		75
		2-58	≤4.5		500-860	≥40	4-75	≥20		
		58-65	≤5.0				75-860	≥50		
	A-D B-E	87-860	≤1.0	≥16	1-4	≥20	1-4	≥20	63VAC 3A	75
					4-65	≥40	4-860	≥40		

外形尺寸
Dimensions


F座公制 (英制)
F Connector Metric (Inch)

单位:mm
Unit:mm



EOC信号混合器

型 号 Mondel	测试端口 Test Port	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation(LP-HP)		过 电 Power Pass	阻 抗 Impedance Ω
		MHz	dB		MHz	dB	MHz	dB		
DDMX-605P -800/910-10A	A-E B-D	3-20	≤1.5	≥7	910-1100	≥45	4-800	≥40		75
		20-700	≤1.5	≥14			800-910	≥50		
		700-800	≤2.5							
	C-D C-E	910-1100	≤6.9	≥12	3-800	≥45	910-1100	≥40	63VAC 10A	75

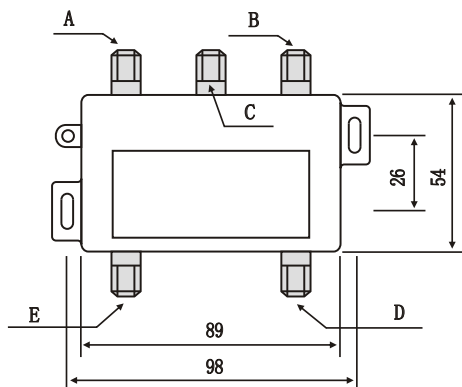
外形尺寸
DimensionsF座公制 (英制)
F Connector Metric (Inch)

单位:mm

Unit:mm



型 号 Model	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation (LP-HP)		过电 Power Pass	阻 抗 Impedance Ω
	MHz	dB		MHz	dB	MHz	dB		
DDMX-709-30/47	5-30	≤ 8.5	≥ 16	47-500	≥ 50	5-30	≥ 50		75
				500-860	≥ 40				
	47-860	≤ 1.0	≥ 16	5-30	≥ 50	47-500	≥ 50		75
						500-860	≥ 40		

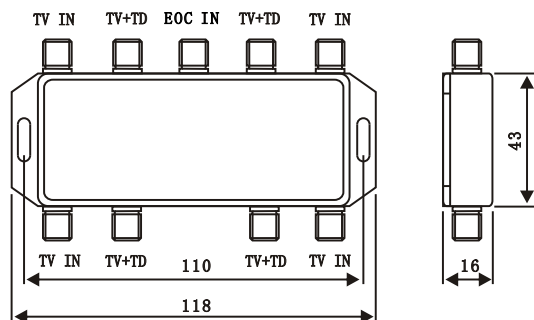外形尺寸
DimensionsF座公制 (英制)
F Connector Metric (Inch)

单位:mm



Unit:mm



EOC信号混合器

型号 Model	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation(LP-HP)		过电 Power Pass	阻抗 Impedance Ω
	MHz	dB		MHz	dB	MHz	dB		
DDMX-709 -65/87	5-65	≤ 8.5	≥ 16	87-300	≥ 50	5-30	≥ 50		75
				300-860	≥ 40				
	87-860	≤ 1.0	≥ 16	5-30	≥ 50	87-300	≥ 50		75
						300-860	≥ 40		




外形尺寸
Dimensions

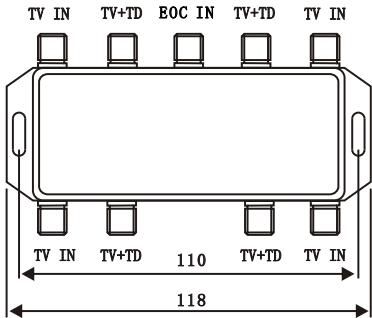

F座公制 (英制)
F Connector Metric (Inch)
单位:mm
Unit:mm

型号 Model	插入损耗 Insertion Loss		反射损耗 Return Loss dB	带外抑制 Out-band Rejection		相互隔离 Isolation(LP-HP)		过电 Power Pass	阻抗 Impedance Ω
	MHz	dB		MHz	dB	MHz	dB		
DDMX-909P-30/47-6A	5-10	≤ 8.5	≥ 10	47-650	≥ 40	5-7.5	≥ 35		75
	10-30	≤ 8.5	≥ 14	650-860	≥ 32	7.5-30	≥ 40		
	47-860	≤ 1.5	≥ 14	5-7.5	≥ 35	47-650	≥ 40	63VAC 6A	75
				7.5-30	≥ 40	650-860	≥ 32		

外形尺寸
Dimensions

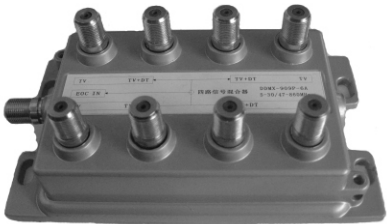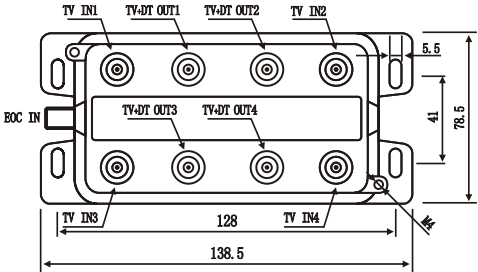

F座公制
F Connector Metric
单位:mm
Unit:mm