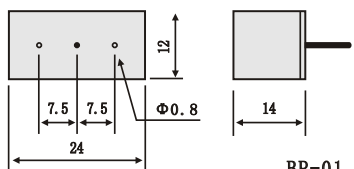


LC频道滤波器

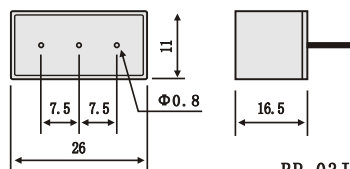
BP-01/02/03/03J 110MHz	01
BP-01/02/03/03J 31.5MHz	01
BP-01/02/03/03J 200.25MHz	01
BP-02/03/ 34.25MHz	01
BP-02/03/ 35.25MHz	01
BP-02/03/ DS1-DS12	02
ZBP-01 Z1-Z16	02

导频滤波器


型 号 (Model)	中心频率 (Center frequency) MHz	插入损耗 (Insertion Loss) MHz dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz dB		阻 抗 (Impeance) Ω
BP-01/02/03/03J	110	108.5-111.5	≤3	≥10	≤100.5 ≥119.5	≥30 75
BP-01/02/03/03J	31.5	31-32	≤3	≥10	≤25 ≥40	≥20 75
BP-01/02/03/03J	200.25	198.25-202.25	≤3	≥10	≤190.25 ≥210.25	≥20 75

外形尺寸
Dimensions



BP-01



BP-03J






BP-02/BP-03


单位:mm
Unit:mm


中频滤波器

型 号 (Mondel)	中心频率 (Center frequency) MHz	插入损耗 (Insertion Loss) MHz dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz dB	阻 抗 (Impeance) Ω	
BP-02/03	34.25	30.25-38.25	≤3	≥10	≤22.25 ≥46.25 ≥25	75
BP-02/03	35.25	31.25-39.25	≤3	≥10	≤23.25 ≥47.25 ≥25	75
BP-02/03	38	34-42	≤3	≥10	≤26 ≥50 ≥25	75



外形尺寸
Dimensions

单位:mm
Unit:mm




LC频道滤波器

型 号 (Model)	频道 (Channel) MHz	插入损耗 (Insertion Loss) MHz	dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz	dB	阻 抗 (Impeance) Ω
BP-02/03	DS1-DS5	$f_0 \pm 4$	≤ 2.5	≥ 10	$f_0 \pm 12$	≥ 23	75
BP-02/03	DS6-DS12	$f_0 \pm 4$	≤ 3.5	≥ 10	$f_0 \pm 12$	≥ 24	75
ZBP-01	Z1-Z7	$f_0 \pm 4$	≤ 3.5	≥ 10	$f_0 \pm 12$	≥ 24	75
ZBP-01	Z8-Z11	$f_0 \pm 4$	≤ 3.5	≥ 10	$f_0 \pm 12$	≥ 20	75
ZBP-01	Z12-Z16	$f_0 \pm 4$	≤ 4.0	≥ 10	$f_0 \pm 12$	≥ 20	75

外形尺寸
Dimensions



单位:mm
Unit:mm

