


目录

HP06	01
HP10F	01
HP11F	01
HP14F	02
HP59	02
HP63J	02
HP65	03
HP202P	03
HP591	03

高通滤波器




型号
(Model)



HP-06

插入损耗 (Insertion Loss) MHz	dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz	dB	阻抗 (Impedance) Ω
47-860	≤1.0	≥16	5-30	≥45	75
22-860	≤1.0	≥14	5-18	≥40	75
87-860	≤1.0	≥16	5-65	≥45	75
550-860	≤3.0	≥15	5-500	≥40	75

外形尺寸
Dimensions



单位:mm
Unit:mm




型号
(Model)


HP-10F

插入损耗 (Insertion Loss) MHz	dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz	dB	阻抗 (Impedance) Ω
54-860	≤1.0	≥15	5-42	≥45	75
70-860	≤1.0	≥15	5-55	≥45	75
87-1000	≤1.0	≥15	5-65	≥45	75

外形尺寸
Dimensions

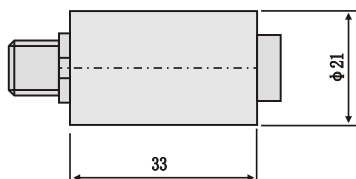

F座公制 (英制)
F Connector Metric (Inch)
单位:mm
Unit:mm




型号
(Model)

HP-11F

插入损耗 (Insertion Loss) MHz	dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz	dB	阻抗 (Impedance) Ω
55-1000	≤1.0	≥16	5-42	≥40	75
87-1000	≤1.0	≥16	5-65	≥40	75
470-860	≤3.0	≥12	5-427	≥40	75
550-860	≤3.0	≥12	5-500	≥40	75


外形尺寸
Dimensions



F座公制 (英制)
F Connector Metric (Inch)
单位:mm
Unit:mm




高通滤波器




型号 (Model)	插入损耗 (Insertion Loss) MHz	dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz	dB	阻抗 (Impedance) Ω
HP-14F	40-860	≤3.0	≥15	5-37	≥50	75
	200-860	≤3.0	≥15	5-183	≥50	75
	450-860	≤3.0	≥15	5-435	≥50	75
	720-860	≤3.0	≥15	5-682	≥50	75

外形尺寸
Dimensions

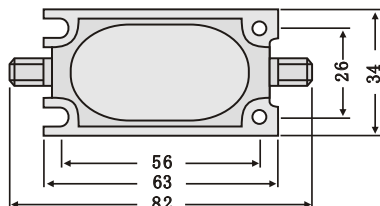


F座公制 (英制)
F Connector Metric (Inch)
单位:mm
Unit:mm





型号 (Model)	插入损耗 (Insertion Loss) MHz	dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz	dB	阻抗 (Impedance) Ω
HP-59	47-1000	≤1.0	≥18	5-35	≥40	75
	54-1000	≤1.0	≥18	5-42	≥40	75
	70-1000	≤1.0	≥18	5-55	≥40	75
	85-1000	≤1.0	≥18	5-65	≥40	75

外形尺寸
Dimensions




单位:mm
Unit:mm





型号 (Model)	插入损耗 (Insertion Loss) MHz	dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz	dB	阻抗 (Impedance) Ω
HP-63J	420-860	≤1.0	≥14	5-330	≥40	75
	470-860	≤1.0	≥14	5-410	≥40	75
	880-2500	≤3.0	≥10	5-830	≥40	75


外形尺寸
Dimensions

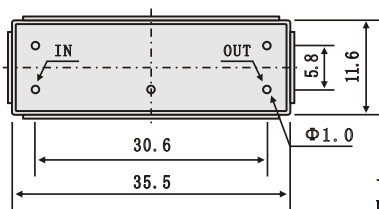

单位:mm
Unit:mm






高通滤波器



型号 (Model)	插入损耗 (Insertion Loss) MHz	dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz	dB	阻抗 (Impedance) Ω
HP-65	15-860	≤1.5	≥14	5-11	≥40	75
	54-860	≤1.0	≥18	5-42	≥50	75
	70-860	≤1.0	≥18	5-55	≥50	75
	87-860	≤1.0	≥18	5-65	≥50	75

外形尺寸


Dimensions



单位:mm
Unit:mm


型号 (Model)	插入损耗 (Insertion Loss) MHz	dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz	dB	过电 (Power Pass)	阻抗 (Impedance) Ω
HP-202P-10A	550-1000	≤3.0	≥14	5-510	≥40	63VAC/10A	75
	562-1000	≤3.0	≥14	5-510	≥40	63VAC/10A	75
	62-860	≤1.0	≥16	5-47	≥50	63VAC/10A	75
	70-1000	≤1.5	≥16	5-55	≥50	63VAC/10A	75

外形尺寸

Dimensions

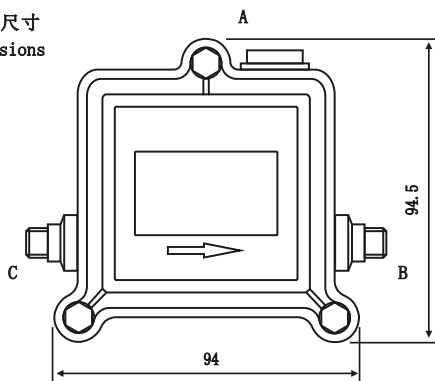

F座公制 (英制)
F Connector Metric (Inch)

单位:mm
Unit:mm


型号 (Model)	插入损耗 (Insertion Loss) MHz	dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz	dB	阻抗 (Impedance) Ω
HP-591	20-100	≤1.0	≥16	5-15	≥40	75
	45-1000	≤1.0	≥16	5-30	≥40	75

外形尺寸

Dimensions


单位:mm
Unit:mm
