


低通滤波器

LP06	01
LP10F	01
LP11F	01
LP14F	02
LP60	02
LP63	02
LP63J	03


低通滤波器





型号 (Model)	插入损耗 (Insertion Loss) MHz	dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz	dB	阻抗 (Impedance) Ω
LP-06	5-28	≤1.0	≥16	≥34.6	≥30	75
	5-65	≤1.1	≥14	≥87	≥40	75
	5-200	≤1.2	≥14	≥250	≥30	75
	5-550	≤1.3	≥16	≥620	≥40	75

外形尺寸

Dimensions



单位:mm
Unit:mm




型号 (Model)	插入损耗 (Insertion Loss) MHz	dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz	dB	阻抗 (Impedance) Ω
LP-10F	5-30	≤1.0	≥16	≥47	≥45	75
	5-65	≤1.0	≥18	≥87	≥45	75
	5-200	≤1.0	≥14	≥220	≥40	75

外形尺寸

Dimensions




F座公制 (英制)
F Connector Metric (Inch)
单位:mm
Unit:mm



型号 (Model)	插入损耗 (Insertion Loss) MHz	dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz	dB	阻抗 (Impedance) Ω
LP-11F	5-45	≤1.0	≥18	≥54	≥40	75
	5-200	≤1.0	≥14	≥236	≥40	75
	5-550	≤3.0	≥14	≥606	≥40	75

外形尺寸

Dimensions




F座公制 (英制)
F Connector Metric (Inch)
单位:mm
Unit:mm










低通滤波器






型号 (Model)	插入损耗 (Insertion Loss)		反射损耗 (Return Loss)	带外抑制 (Out-band Rejection)		阻抗 (Impedance)
	MHz	dB		MHz	dB	Ω
LP-14F	5-108	≤3.0	≥14	≥118	≥50	75
	5-450	≤2.6	≥14	≥490	≥50	75
	5-550	≤3.0	≥14	≥600	≥50	75
	5-750	≤3.0	≥14	≥815	≥50	75

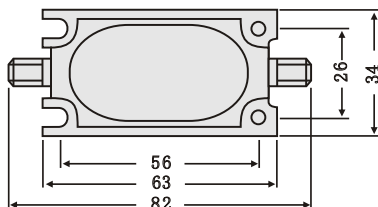外形尺寸
DimensionsF座公制 (英制)
F Connector Metric (Inch)单位:mm
Unit:mm


型号 (Model)	插入损耗 (Insertion Loss)		反射损耗 (Return Loss)	带外抑制 (Out-band Rejection)		阻抗 (Impedance)
	MHz	dB		MHz	dB	Ω
LP-60	5-55	≤1.0	≥18	≥70	≥40	75
	5-65	≤1.0	≥18	≥87	≥40	75
	5-90	≤1.0	≥18	≥110	≥40	75

外形尺寸
Dimensions单位:mm
Unit:mm

型号 (Model)	插入损耗 (Insertion Loss)		反射损耗 (Return Loss)	带外抑制 (Out-band Rejection)		阻抗 (Impedance)
	MHz	dB		MHz	dB	Ω
LP-63	5-30	≤1.0	≥18	≥38	≥50	75
	5-65	≤1.0	≥18	≥87	≥50	75
	5-55	≤1.0	≥18	≥70	≥50	75

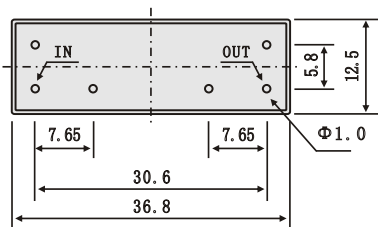
外形尺寸
Dimensions单位:mm
Unit:mm

低通滤波器


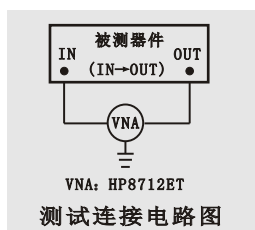


型号 (Model)	插入损耗 (Insertion Loss) MHz dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz dB	阻抗 (Impedance) Ω
LP-63J	5-30 ≤ 1.0	≥ 18	≥ 40	75
	5-65 ≤ 1.0	≥ 18	≥ 87	75
	5-634 ≤ 3.0	≥ 14	≥ 697	75

外形尺寸
Dimensions

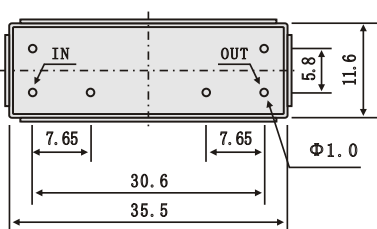


单位:mm
Unit:mm





型号 (Model)	插入损耗 (Insertion Loss) MHz dB	反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz dB	阻抗 (Impedance) Ω
LP-65	5-55 ≤ 1.0	≥ 18	≥ 70	75
	5-65 ≤ 1.0	≥ 18	≥ 87	75
	5-534 ≤ 2.5	≥ 14	≥ 584	75

外形尺寸
Dimensions

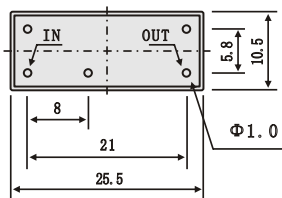


单位:mm
Unit:mm

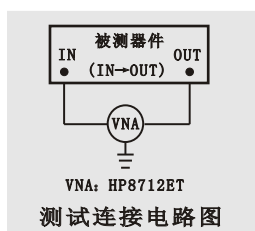

型 号 (Model)	插入损耗 (Insertion Loss) MHz dB		反射损耗 (Return Loss) dB	带外抑制 (Out-band Rejection) MHz dB	阻 抗 (Impedance) Ω
LP-69	5-65	≤1.0	≥20	≥87	≥35 75

外形尺寸
Dimensions

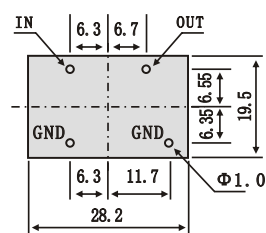

单位:mm
Unit:mm

